
ACE[®] C18-Amide

For increased polar retention and alternative selectivity



- Alternative selectivity for method development
- Improved separations with polar, acidic, basic and phenolic compounds
- High efficiency 2μm, 3μm, 5μm and 10μm particles for UHPLC and HPLC
- Ultra-inert for maximum performance and reproducibility

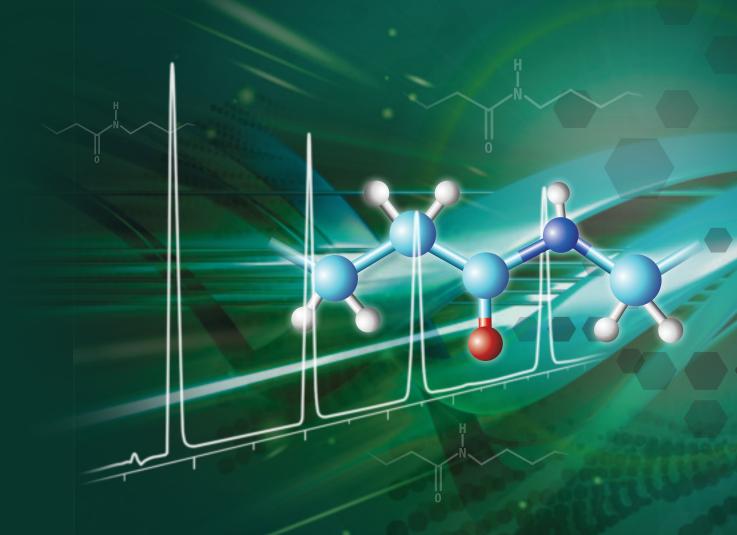

ACE® C18-Amide


For increased polar retention and alternative selectivity

Ideal Column Choice for Method Development

- Alternative selectivity to C18 and C8 columns with polar molecules especially for acids
- Compatible with 100% aqueous mobile phases
- High efficiency 2μm, 3μm, 5μm and 10μm particles for UHPLC, HPLC and preparative separations
- Low bleed for UV and LC/MS compatibility


Recommended Applications

- Small water soluble analytes and polar compounds
- H-bond donors, acids, bases and phenolic compounds
- Small peptides



Why does ACE C18-Amide Provide Alternative Selectivity?

- ACE C18-Amide combines a C18 with a polar amide group on a single ligand
- Extended spacer technology additionally provides extended column lifetime

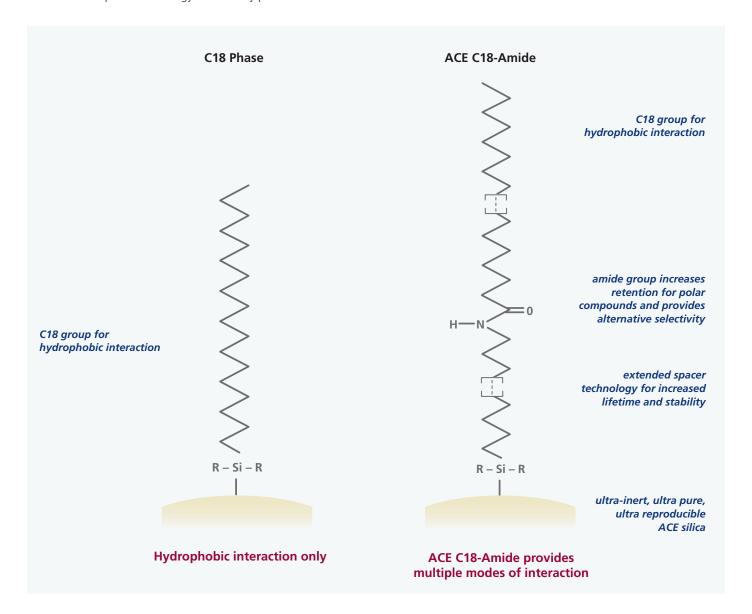


Leverage the Power of Selectivity with ACE C18-Amide to pull peaks apart

The resolution equation determines the parameters that contribute to resolution; N, α and k. In recent years there has been a significant focus on the use of ultra efficient "UHPLC" columns (such as ACE Excel 2µm columns) as a means of achieving separation goals.

$$R_{s} = \left(rac{1}{4}
ight)N^{0.5}\left(rac{lpha-1}{lpha}
ight)\left(rac{k}{1+k}
ight)$$
Resolution Efficiency Selectivity Retention Factor

However, selectivity is often overlooked. This is unfortunate as of the three parameters that affect resolution, selectivity is the most powerful (see Figure 1). By leveraging both efficiency and selectivity, better and faster separations can often be achieved.

ACE C18-Amide is the latest addition to the ACE range of bonded phases which offer both complementary selectivity and the option of $2\mu m$, $3\mu m$, $5\mu m$ and $10\mu m$ particle sizes - to enable development of rugged, robust UHPLC and HPLC methods.

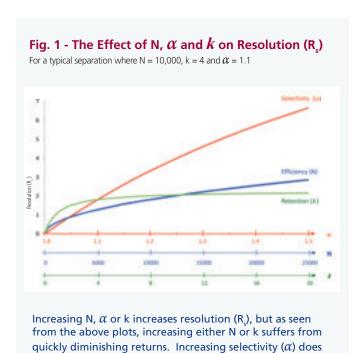


not have this problem and is therefore the most powerful of these three variables to optimise when developing a

separation.


PULL PEAKS APART

Leverage the power of bonded phase selectivity to pull peaks apart


Figure 2 illustrates the difference between two ACE bonded phases, C18-Amide and C18. Although both phases offer the possibility of strong hydrophobic interaction from their respective C18 chains, the amide group embedded within the C18-Amide phase introduces additional modes of interaction which ultimately increases retention for polar compounds and provides alternative selectivity.

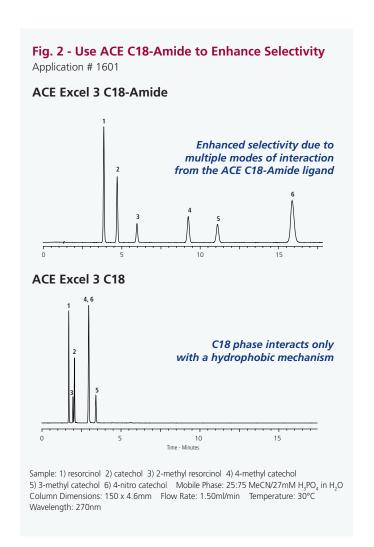


ACE C18-Amide Provides Enhanced Polar Selectivity

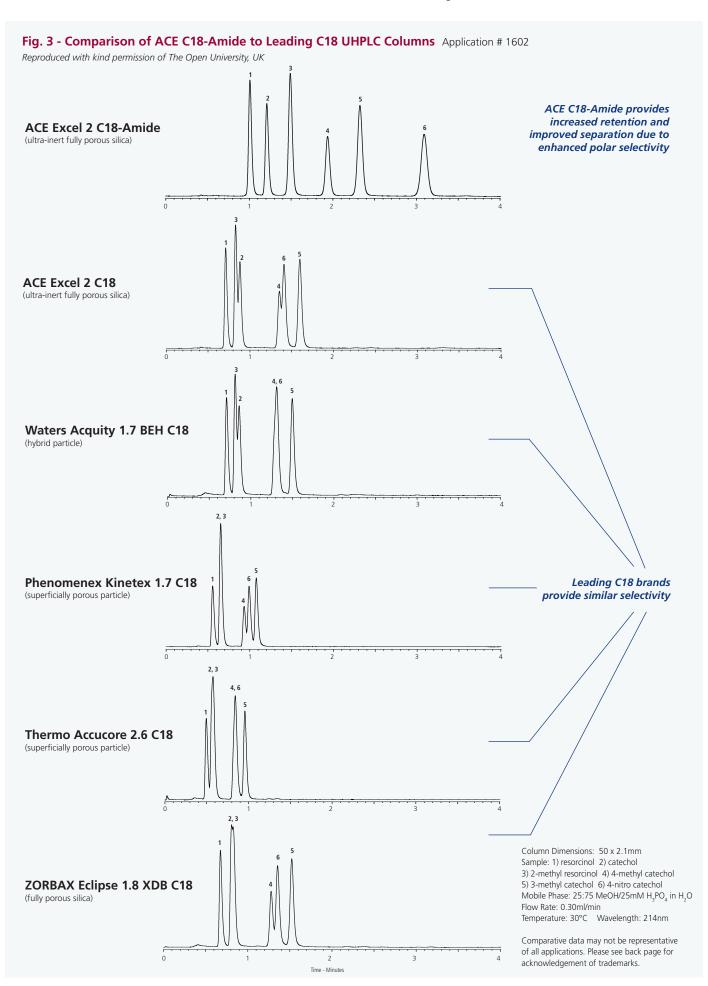


Exploit Alternative Selectivity for Method Development

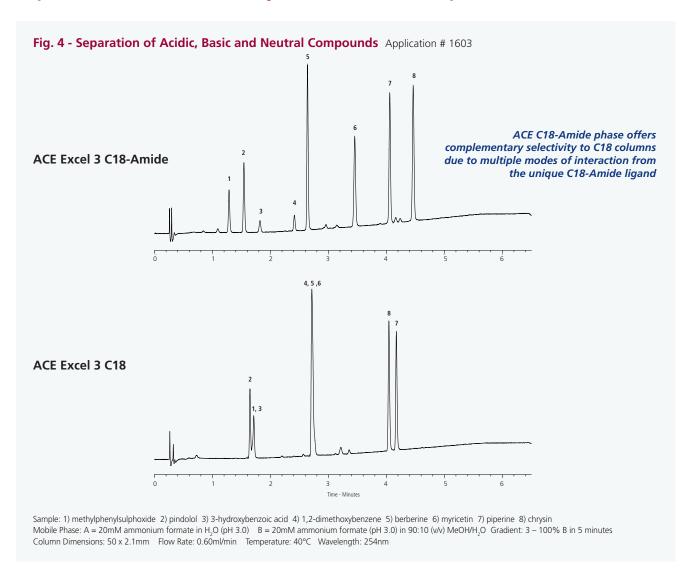


Compatible with 100% Aqueous Mobile Phases

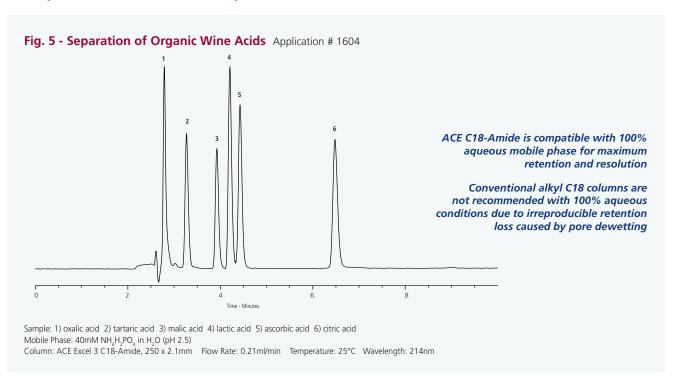


ACE C18-Amide Provides Alternative Selectivity

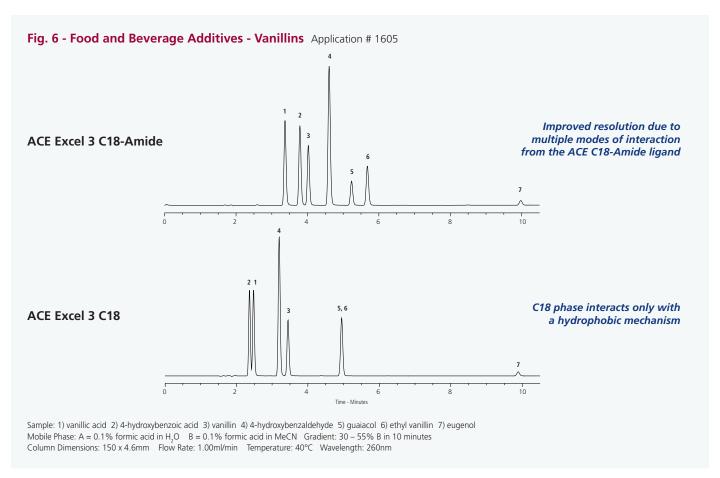

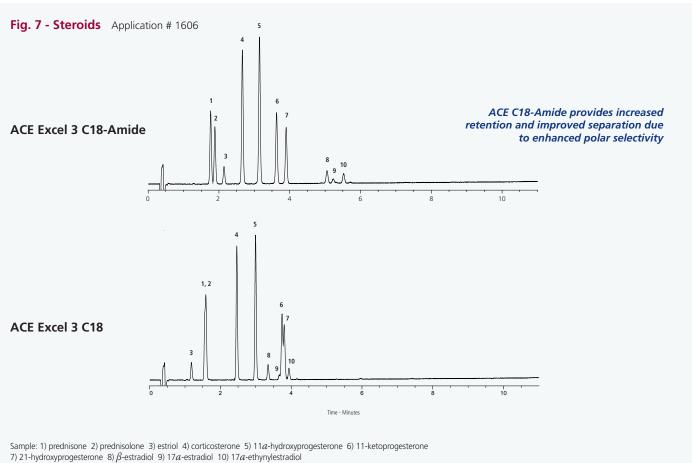

Mobile Phase: A = 0.1% formic acid in H_2O B = 0.1% formic acid in MeCN Gradient: 25 – 80% B in 10 minutes Column Dimensions: 50 x 2.1mm Flow Rate: 0.40ml/min Temperature: 25°C Wavelength: 260nm

Guaranteed Reproducibility and Fully Scalable

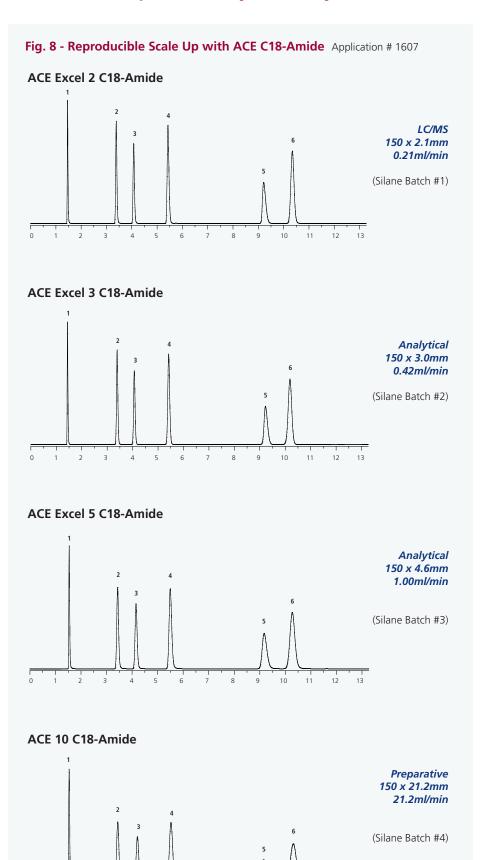

The availability of 2µm, 3µm, 5µm and 10µm particle sizes combined with a range of dimensions from UHPLC through to preparative HPLC scale ensures that methods can be reproducibly scaled up or down.

The chromatograms in figure 8 demonstrate the excellent reproducibility achieved when changing both silica batch and silane batch, and the reproducible scalability obtained when changing particle size and column diameter.

Mobile Phase: 35:65 MeCN/0.1% TFA in H₂O Temperature: 22°C Wavelength: 254nm

Sample: 1) uracil 2) 4-hydroxybenzoic acid 3) acetylsalicylic acid 4) benzoic acid 5) 2-hydroxybenzoic acid 6) ethyl paraben

Product Availability and Specifications

Phase	Functional Group	Endcapped	Particle Size (µm)	Pore Size (Å)	Surface Area (m²/g)	Carbon Load (%)	Maximum pH Range	USP Listing
ACE C18-Amide	Octadecyl with integral amide polar group	Yes	2, 3, 5, 10	100	300	16.4	2.0-8.0 ^a	L1 / L60

^a For optimum column lifetime, a pH range of 2-8 is recommended. To increase column lifetime at higher pH, organic buffers, low buffer concentrations, high % organic solvent and low temperatures must be considered. Further information is contained within "A Guide to HPLC and LC/MS Buffer Selection" by John Dolan – please contact your distributor to request your FREE copy or visit www.ace-hplc.com.

To further extend column lifetime under HPLC conditions (up to 5000psi/350bar), ACE guard cartridges or ACE HPLC pre-column filters are recommended.

To further extend column lifetime under UHPLC conditions (up to 15000psi/1000bar), ACE UHPLC pre-column filters are recommended.

For HPLC column connections up to 5000psi (350bar), PEEK fingertight fittings (p/n ACE-CC10) are recommended.

For UHPLC column connections up to 15000psi (1000bar), reuseable fittings (p/n EXL-CC10) are recommended.

For further details please contact your distributor or visit www.ace-hplc.com.

ACE Excel 2µm C18-Amide UHPLC/HPLC Columns (supplied in dual compatible UHPLC/HPLC "Excel" hardware format with 1000bar/15000psi pressure limit)

Column	Column Length								
Diameter	20mm	30mm	35mm	50mm	75mm	100mm	125mm	150mm	
2.1mm	EXL-1012-0202U	EXL-1012-0302U	EXL-1012-3502U	EXL-1012-0502U	EXL-1012-7502U	EXL-1012-1002U	EXL-1012-1202U	EXL-1012-1502U	
3.0mm	EXL-1012-0203U	EXL-1012-0303U	EXL-1012-3503U	EXL-1012-0503U	EXL-1012-7503U	EXL-1012-1003U	EXL-1012-1203U	EXL-1012-1503U	
4.6mm	EXL- 1012-0246U	EXL-1012-0346U	EXL-1012-3546U	EXL-1012-0546U	EXL-1012-7546U	EXL-1012-1046U	EXL-1012-1246U	EXL-1012-1546U	

ACE Excel 3µm C18-Amide UHPLC/HPLC Columns (supplied in dual compatible UHPLC/HPLC "Excel" hardware format with 1000bar/15000psi pressure limit)

Column	Column Length										
Diameter	20mm	30mm	35mm	50mm	75mm	100mm	125mm	150mm	250mm		
2.1mm	EXL-1112-0202U	EXL-1112-0302U	EXL-1112-3502U	EXL-1112-0502U	EXL-1112-7502U	EXL-1112-1002U	EXL-1112-1202U	EXL-1112-1502U	EXL-1112-2502U		
3.0mm	EXL-1112-0203U	EXL-1112-0303U	EXL-1112-3503U	EXL-1112-0503U	EXL-1112-7503U	EXL-1112-1003U	EXL-1112-1203U	EXL-1112-1503U	EXL-1112-2503U		
4.6mm	EXL-1112-0246U	EXL-1112-0346U	EXL-1112-3546U	EXL-1112-0546U	EXL-1112-7546U	EXL-1112-1046U	EXL-1112-1246U	EXL-1112-1546U	EXL-1112-2546U		

ACE Excel 5µm C18-Amide UHPLC/HPLC Columns (supplied in dual compatible UHPLC/HPLC "Excel" hardware format with 1000bar/15000psi pressure limit)

Column	Column Length									
Diameter	20mm	30mm	35mm	50mm	75mm	100mm	125mm	150mm	250mm	
2.1mm	EXL-1212-0202U	EXL-1212-0302U	EXL-1212-3502U	EXL-1212-0502U	EXL-1212-7502U	EXL-1212-1002U	EXL-1212-1202U	EXL-1212-1502U	EXL-1212-2502U	
3.0mm	EXL-1212-0203U	EXL-1212-0303U	EXL-1212-3503U	EXL-1212-0503U	EXL-1212-7503U	EXL-1212-1003U	EXL-1212-1203U	EXL-1212-1503U	EXL-1212-2503U	
4.6mm	EXL-1212-0246U	EXL-1212-0346U	EXL-1212-3546U	EXL-1212-0546U	EXL-1212-7546U	EXL-1212-1046U	EXL-1212-1246U	EXL-1212-1546U	EXL-1212-2546U	

ACE 5µm C18-Amide Semi-Prep and Preparative HPLC Columns

Column	Column Length										
Diameter	50mm	75mm	100mm	125mm	150mm	250mm					
7.75mm	ACE-1212-0508	ACE-1212-7508	ACE-1212-1008	ACE-1212-1208	ACE-1212-1508	ACE-1212-2508					
10.0mm	ACE-1212-0510	ACE-1212-7510	ACE-1212-1010	ACE-1212-1210	ACE-1212-1510	ACE-1212-2510					
21.2mm	ACE-1212-0520	ACE-1212-7520	ACE-1212-1020	ACE-1212-1220	ACE-1212-1520	ACE-1212-2520					

ACE 10µm C18-Amide Analytical, Semi-Prep and Preparative HPLC Columns Please enquire

ACE® is a registered trademark of Advanced Chromatography Technologies Limited. ACE Excel™ is a trademark of Advanced Chromatography Technologies Limited. Advanced Chromatography Technologies Limited acknowledges the registered and unregistered trademarks of Agilent Technologies Inc., Phenomenex Inc., Thermo Fisher Scientific and Waters Corporation and has no affiliation with any of these companies.

ACE® UHPLC and HPLC columns are available through our international distributor network Available from:

